



Rejuvenator Spray System Technical Data Sheet

- Spray Asphalt with Rejuvenator During the Recycling Process
- Spray Hopper with Release Agent for Easy Clean Out

Standard Technical Data:


- Heated or Non-Heated Tank
- Rejuvenator Holding Tank Capacity: 30 Gallons
- Release Agent Holding Tank Capacity: 10 Gallons
- High Performance Pump System:
 - 5 HP Honda Motor
 - Viking HL32 Pump
 - 1/2" Hoses
 - Spray Wand with Flow Control Valve
- Lockable Fill Lid
- Molasses Valve at Base of Tank
- Paint System: Sandblasted with Two Coats of Epoxy Primer and Black Urethane Finish
- **Heated Holding Tank:**
 - Diesel or Propane Fuel Source
 - Automatic Temperature Control
 - Double Wall Construction
 - Inner Wall - 10 Gauge Steel
 - Outer Wall - 18 Gauge Steel
 - Insulated
 - Separate Rejuvenator and Release Agent Holding Tanks
- **Non-Heated Holding Tank:**
 - Single Wall Construction
 - Outer Wall - 10 Gauge Steel
 - Combined Rejuvenator and Release Agent Holding Tanks
- Optional Retractable Hose Reel
- Available as a "Bolt-On" Option




Holding Tank and Spray Wand



Coating Asphalt with Rejuvenator

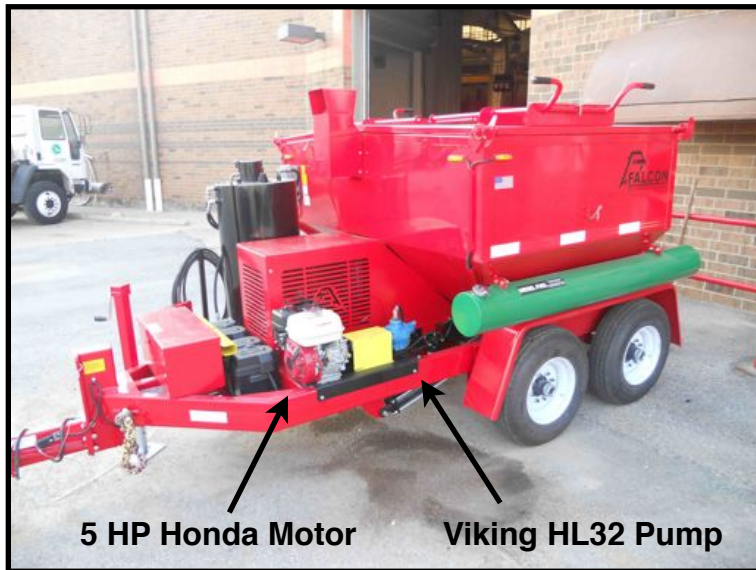

5 HP Honda Motor Viking HL32 Pump

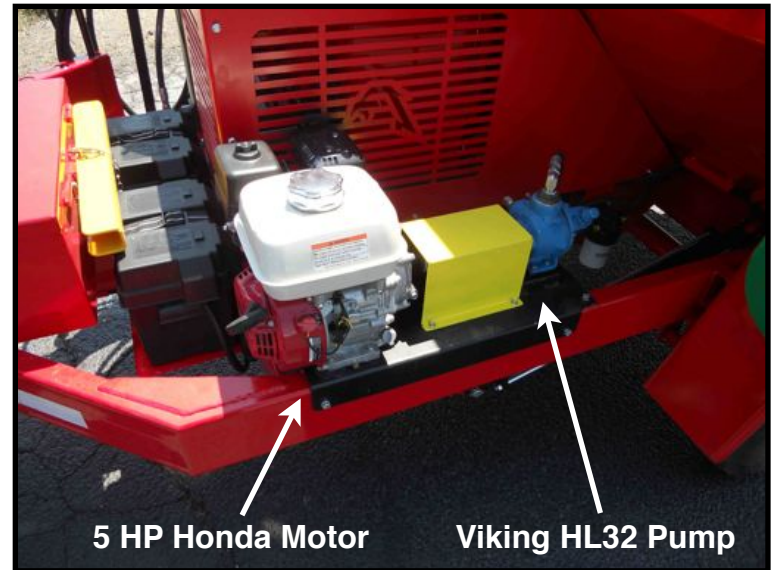

5 HP Honda Motor Viking HL32 Pump

High Performance Pumping System

